


SL2 LUBRICATION CARDWINDER 720

CHEMISTRY
TECHNOLOGY
COMPETENCE

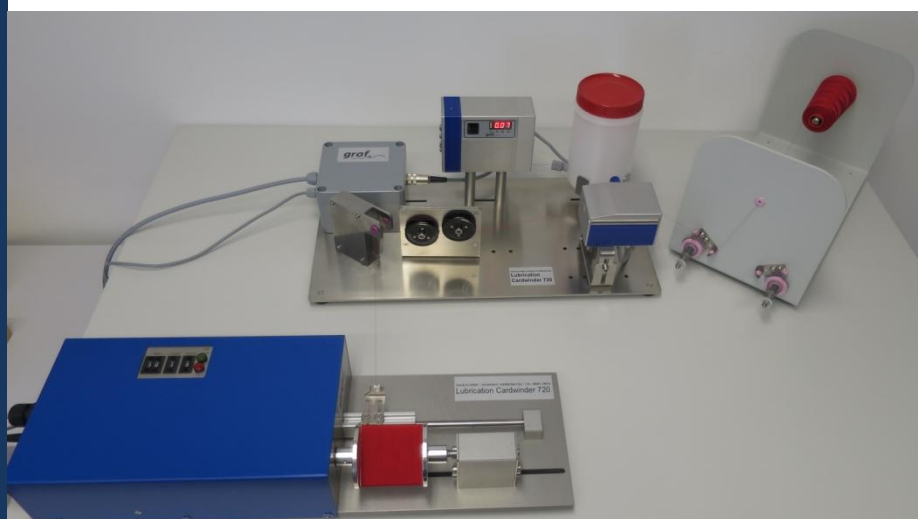

TECHNICAL DESCRIPTION

The SL2 Lubrication Cardwinder 720 is capable of doing both card winding and lubrication in a single process.

With this equipment, the color shade of the thread after applying the lubricant can be established quickly and easily without the necessity of lubrication the thread on a winding machine.

TECHNICAL SPECIFICATIONS

- *Winding speed 300 – 2700 rpm, adjustable in steps of 300 rpm*
- *Thread layer distance 0-1 mm per turn, adjustable in steps of 0.01 mm*
- *Number of layers selectable 1 – 9*
- *Standard card size: 65 x 68 x 1,5 mm*
- *Available for applying Silwa® water-free and Silwa® water-based lubricants, in combination with a Single Lub Application System*
- *Electronic overload and jamming protection*
- *Delivery includes a bobbin bracket for one spool*